



# TP-5000V

## Guard Patrol Management System


### Highlight Spec.

- Alloy body, moulded rubber shell
- Completely water resistant
- Sabotage absorbent, resistant to electrical shock
- USB data transfer, no need downloader station
- High storage capacity 4Mb Flash / 60,000 records
- Easy operation, easy maintenance
- Reading distance ≤ 5cm
- Real time internal clock
- Long capacity lithium battery
- Low power consumption and long battery life, last for 1 year / up to 270,000 scans

Patrol report from 03/04/2012 00:00:00 to 03/04/2012 23:59:59 All Data					
Route	Planned time	Guard	Checkpoint	Actual arriving time	Event
Building A	03/04/2012 00:00:00 to 03/04/2012 23:59:00	Guard 1	CP-01	03/04/2012 20:27:51	
		Guard 1	CP-02	03/04/2012 20:27:52	
		Guard 1	CP-03	03/04/2012 20:27:53	
		Guard 1	CP-04	03/04/2012 20:33:12	
		Guard 1	CP-05	03/04/2012 20:27:54	
		Guard 1	CP-06	Missing	
		Guard 1	CP-07	03/04/2012 20:27:55	
		Guard 1	CP-08	03/04/2012 20:27:56	
		Guard 1	CP-09	03/04/2012 20:27:57	E-06 Power Failure

### Stat. forms from 23/03/2012 to 23/03/2012


from 23/03/2012 to 23/03/2012						
Route	Guard man name	Planned times	Actual times	Missing times	Attendance rate	Absenteeism rate
Building A	Ahmad	3	3	0	100.00%	0.00%
	Mito	6	6	0	100.00%	0.00%
<b>Building A Total</b>		<b>9</b>	<b>9</b>	<b>0</b>	<b>100.00%</b>	<b>0.00%</b>



## Specifications

- Reading Mode: RFID125KHZ, Reading distance 3cm-5cm.
- Data Storage: 16Mbit flash (60,000 pieces).
- Prompt Alert : Beep sound with colourful LED light (Blue).
- Tag ID Number:
  - 8bit Hexadecimal number in reader (4byte), and 10bit decimalism number in the software.
  - Can be expanded to 10bit Hexadecimal number (5byte).
- Communication: USB (USB2.0) upload data 15,000 pieces per minutes.
- Battery Type: 3.0V Long capacity lithium battery (non-rechargeable).
- Battery Life: up to 1 year or 270,000 scans (whichever come first).
- IP Rate: IP67
- Colour: Grey
- Operating Temperature: -40°C~+85°C

## System Diagram

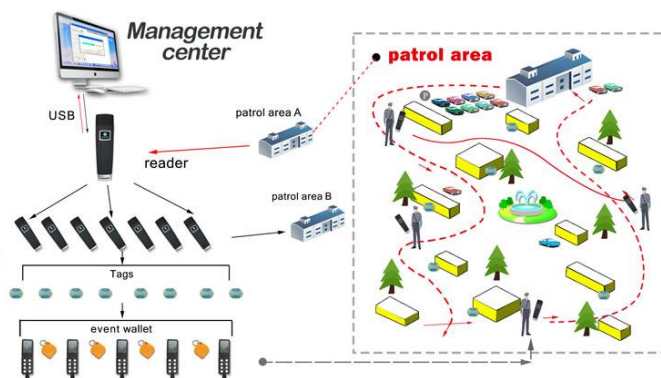

Sales Enquiry:-

SG: +65 9777 1699 | MY: +6017 708 1699 | Email: sales@thizx-solutions.com

THIZX SOLUTIONS PTE. LTD. | THIZX SOLUTIONS SDN. BHD. | URL: www.thizx-solutions.com