




TFP-18

Time Attendance & Access Control Biometric Fingerprint Device

System Diagram

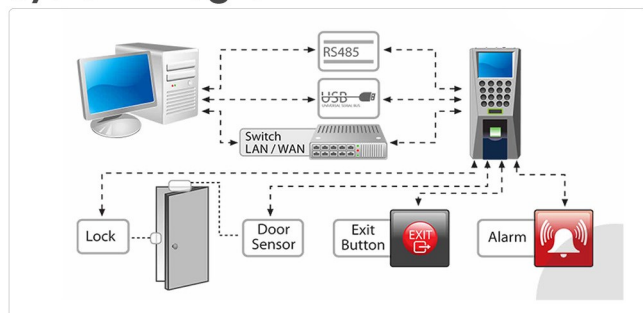

Features

Standard Features

- Reliable, durable & highly accurate ZK optical
- Built-in Serial and Ethernet ports sensor
- Built-in Wiegand input/output ports
- Less than 1 second user recognition
- Stores 3000 templates and 30,000 transactions
- Built-in USB port allows for manual data transfer
- Reads Fingerprint and/or Pin's and/or RFID card

Enhanced Features

- Audio - Visual indications for valid / invalid entries
- Supports 50 time zones, 5 groups and 10 combinations
- Tamper switch
- Integrated 125kHz RFID proximity reader

Specifications

- | | |
|------------------------------|---|
| • Fingerprint Capacity: | 3,000 templates |
| • Transaction Capacity: | 30,000 transactions |
| • RFID Card Capacity: | 10,000 cards |
| • Sensor: | Optical Sensor |
| • Algorithm Version: | Finger v10.0 |
| • Built-in Card Reader: | 125kHz RFID proximity reader |
| • Communication: | RS485, TCP/IP, USB-host |
| • Wiegand Ports: | Input and Output any bits |
| • Access Control interfaces: | 3rd party electric lock, door sensor, exit button, door alarm |
| • Access Control functions: | 50 time zones, 5 access control groups, 10 combinations |
| • Power Supply: | 12V DC 3A |
| • Operating Temperature: | 0 °C - 45 °C |
| • Operating Humidity: | 20%-80% |
| • Dimension: | 80 X 183 X 42mm |

Sales Enquiry:-

SG: +65 9777 1699 | MY: +6017 708 1699 | Email: sales@thizx-solutions.com

THIZX SOLUTIONS PTE. LTD. | THIZX SOLUTIONS SDN. BHD. | URL: www.thizx-solutions.com