



TFR-32

Time Attendance & Access Control Biometric Face Recognition Device


Features

- 1, 200 face and 2,000 fingerprint templates
- Multi-languages
- High verification speed
- Advanced and user-friendly UI
- Chip encryption for firmware protection
- Optional built-in battery backup providing approximately 4 hours of continuous operation
- Easy to extend functions and customize client's requirements
- One face template is registered for one user only
- Able to detect whether the face is an actual face or a photo, enhancing the security level of verification

Specifications

Display	4.3-Inch Touch Screen
Face capacity	1,200 (1:1N)
Fingerprint capacity	2000
ID Card capacity	10,000 (optional)
Logs capacity	100,000
Communication	TCP/IP, RS232/485, USB Host
Standard Functions	Automatic Status Switch, Self-Service Query, Work Code, SMS, DST, T9 Input, 9 Digit User ID, Scheduled Bell, Photo ID
Interfaces for Wiegand Signal	3rd Party Electric Lock, Door Sensor, Exit Button, Alarm Output
Optional Functions	MiFare Card, ADMS, 2000 mAh Backup Battery
Power Supply	12V 3A
Operating Temperature	0 °C- 45 °C
Operating Humidity	20%-80%
Dimensions	193.6*165.2*86mm (Length*Width*Thickness)
Package Weight	1.6 kg

System Diagram

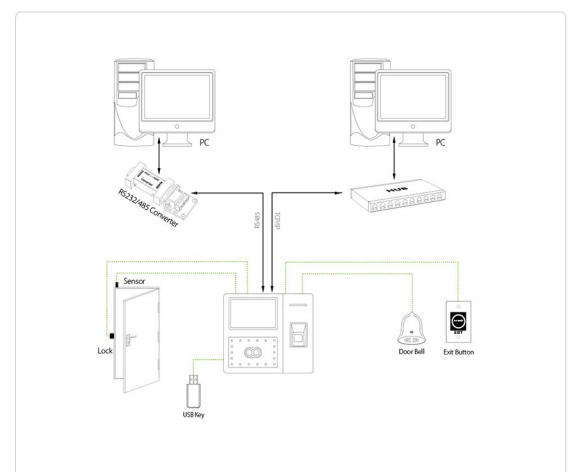

Sales Enquiry:-

SG: +65 9777 1699 | MY: +6017 708 1699 | Email: sales@thizx-solutions.com

THIX SOLUTIONS PTE. LTD. | THIX SOLUTIONS SDN. BHD. | URL: www.thizx-solutions.com